



VHF AIR BAND TRANSCEIVERS

IC-A14

(Full keypad)

IC-A14S

(Simple keypad)

Easy to Use, Rugged and Compact with Icom's "V Speed" Audio!

700mW* loud audio

Because air band radios are usually operated in high-noise environments, it is essential for the radio to provide loud and clear audio. The IC-A14/S series employs a BTL amplifier that doubles the audio output, offering loud and clear audio that'll cut through cabin or tarmac noise. (* Internal speaker only)

Full keypad type or Simple keypad type

The IC-A14 full keypad type allows you to input the channel or frequency directly and has an exclusive button for the 121.5MHz emergency channel. The IC-A14 receives NAV and WX channels. The IC-A14S simple keypad type provides simpler operation with a minimum of buttons that is suitable for ground crews.

Compact, light weight and rugged body

The IC-A14/S series is compact (only 120mm tall) and light weight (approx. 350g including antenna and BP-232N). The water resistant construction, equivalent to IPX4, provides reliable operation in wet conditions.

Large capacity Lithium-Ion battery pack

With the 2000mAh large capacity Lithium-Ion battery pack, BP-232N, the IC-A14/S series provides stable output power and 18 hours long (approx.) operating time*. The BP-261, battery case takes 6 AA (LR6) alkaline cells for convenient battery backup.

* Typical operation, Tx:Rx: Stand-by=5:5:90.

200 channels with memory banks

A total of 200* memory channels can be named with an 8-character channel name for easy recognition. For fast and simple operation, these channels can be grouped into 10 memory banks*.

* IC-A14 only. The IC-A14S has 100 memory channels and memory banks are not available.

BC-179 holder type battery charger

The battery charger, BC-179, securely holds and charges the radio, even in bumpy conditions.

The cigarette lighter cable, CP-22, can be used with the BC-179.



IC-A14



IC-A14S

Other outstanding features

- 5W typ. (PEP), 1.5W (CW) output power
- Side tone function allows you to hear your own voice via a third party aviation headset
- LCD backlight for night time operation

- ANL (Auto Noise Limiter) for noise reduction
- Low battery indication and beep alert
- Adjustable microphone gain setting
- BNC type antenna connector

Supplied accessories: (* depending on version)

- Battery pack, BP-232N or battery case, BP-261*
- Battery charger, BC-179* • AC adapter, BC-174A/E*
- Belt clip, MB-94 • Antenna, FA-B02AR
- Handstrap

SPECIFICATIONS

GENERAL

- Frequency range : IC-A14 Tx (COM) 118.000-136.975MHz Rx (COM, NAV) 108.000-136.975MHz (Weather) 161.650-163.275MHz IC-A14S Tx/Rx (COM) 118.000-136.975MHz
- Mode : AM (6K00A3E) Weather (IC-A14 only) FM (16K0G3E)
- Channel spacing : 25kHz
- No. of memory channels : IC-A14 200 channels with 10 banks IC-A14S 100 channels
- Antenna impedance : 50Ω (BNC type)
- Power supply requirement : 7.4V DC (Icom battery pack)
- Current drain (at 7.2 V DC) : Tx 1.5A Max. audio 500mA Rx Stand-by 50mA typical
- Operating temp. range : -10°C to +60°C ; +14°F to +140°F
- Dimensions (W×H×D) : 53×120×36.9 mm (projections not included) ; 2^{3/32}×4^{23/32}×1^{17/16} in
- Weight (approx.) : 350g; 12.3oz (with antenna and BP-232N)

TRANSMITTER

- Output power (at 7.4V DC) : 5.0/1.5W typ. (PEP/CW)
- Modulation limiting : 70-100%
- Frequency stability : ±5ppm
- Audio harmonic distortion : Less than 10% (at 60% mod.)
- Hum and noise ratio : More than 35dB
- Spurious emissions : More than 46dB (Except operating freq. ±62.5kHz point)
- Microphone connector : 3-conductor 2.5 (d) mm (1/16") more than 150Ω

RECEIVER

- Intermediate frequency : 1st/2nd 46.35MHz/450kHz
- Sensitivity : COM (at 6dB S/N) -6dBμ typ. NAV (at 6dB S/N) -3dBμ typ. (IC-A14 only) WX (at 12dB SINAD) -13dBμ typ. (IC-A14 only)
- Squelch sensitivity (at threshold) : AM Less than 0dBμ FM (IC-A14 only) Less than -5dBμ
- Selectivity : More than 7.5kHz/-6dB Less than 25kHz/-60dB

- Hum and noise : More than 35dB (at 30% mod.)
- Spurious response : AM More than 60dB FM (IC-A14 only) More than 30dB
- Audio output power : Internal speaker More than 700mW External speaker More than 500mW at 10% distortion with an 8Ω load, 30% modulation
- Ext. speaker connector : 3-conductor 3.5 (d) mm (1/8")/ 8Ω

Measurement made in accordance with FCC Part 87 for USA versions. All specifications are subject to change without notice or obligation.

Applicable U.S. Military Specifications & IP Rating

Standard	MIL 810 F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4-3	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain	506.4	I, III
Humidity	507.4	-
Salt Fog	509.4	-
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

Ingress Protection Standard	
Water	IPX4 (Water resistant protection)

OPTIONS


* Some options may not be available in some countries. Please ask your dealer for details.



BP-230N : 7.4V/980mAh Li-Ion BATTERY PACK Provides 8.5 hours* operating time (approx.).
BP-232N : 7.4V/2000mAh Li-Ion BATTERY PACK Provides 18 hours* operating time (approx.).
BP-261 : BATTERY CASE (Available soon) Battery case for AA (LR6)×6 alkaline cells. (* Tx (Hi): Rx: standby=5:5:90.)




REGULAR CHARGERS
BC-179 BATTERY CHARGER + BC-174 AC ADAPTER
 Charges the BP-232N in 12 hours (approx.).
BC-171 DESKTOP CHARGER+ BC-147 AC ADAPTER
 Charges the BP-232N in 10 hours (approx.).



RAPID CHARGER
BC-160 DESKTOP CHARGER + BC-145 AC ADAPTER
 Charges the BP-232N in 3 hours (approx.).
BC-119N + AD-106 + BC-145 is also available.



MULTI-CHARGER
BC-121N MULTI-CHARGER + AD-106 CHARGER ADAPTER + BC-157 AC ADAPTER
 Rapidly charges up to 6 battery packs (Six AD-106s are required). Charging the BP-232N in 3 hours (approx.).

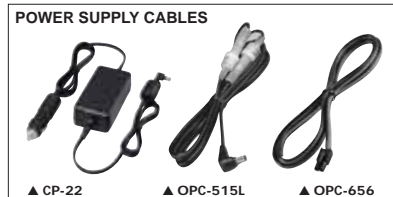

POWER SUPPLY CABLES
CP-22 : Cigarette lighter cable with DC-DC converter for use with BC-179. 12/24V DC input available.
OPC-515L : Power supply cable for use with BC-119N/160.
OPC-656 : Power supply cable for use with BC-121N.



SPEAKER-MIC
HM-173 : Provides convenient lightweight operation.



HEADSET ADAPTER CABLE
OPC-499 : For use with third party headsets.



BELT CLIP AND LEATHER BELT HANGER
MB-94 : Alligator type. Same as supplied.
MB-96F : Fixed type belt hanger.



ANTENNA
FA-B02AR : Same as supplied.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia and/or other countries.

Icom Inc. 1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

2380 116th Avenue NE, Bellevue, WA 98004, U.S.A.
 Phone: +1 (425) 454-8155
 Fax: +1 (425) 454-1509
 E-mail: sales@icomamerica.com
 URL: <http://www.icomamerica.com>

Icom New Zealand

146A Harris Road, East Tamaki, Auckland, New Zealand
 Phone: +64 (09) 274 4062
 Fax: +64 (09) 274 4708
 E-mail: inquiries@icom.co.nz
 URL: <http://www.icom.co.nz>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
 Phone: +44 (01227) 741741
 Fax: +44 (01227) 741742
 E-mail: info@icomuk.co.uk
 URL: <http://www.icomuk.co.uk>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
 Phone: +886 (02) 2559 1899
 Fax: +886 (02) 2559 1874
 E-mail: sales@asia-icom.com
 URL: <http://www.asia-icom.com>

Icom Canada

Glenwood Centre #150-6165 Highway 17, Delta, B.C., V4K 5B8, Canada
 Phone: +1 (604) 952-4266
 Fax: +1 (604) 952-0090
 E-mail: info@icomcanada.com
 URL: <http://www.icomcanada.com>

Icom (Europe) GmbH

Communication Equipment Himmelfeiger Str. 100, D-40225 Düsseldorf, Germany
 Phone: +49 (0211) 346047
 Fax: +49 (0211) 333639
 E-mail: info@icom-europe.com
 URL: <http://www.icomeurope.com>

Icom France s.a.s.

Zac de la Plaine, 1 Rue Brindejonc des Moulinais, BP 45804, 31505 Toulouse Cedex 5, France
 Phone: +33 (5) 61 36 03 03
 Fax: +33 (5) 61 36 03 00
 E-mail: icom@icom-france.com
 URL: <http://www.icom-france.com>

Beijing Icom Ltd.

10C07, Long Silver Mansion, No.88, Yong Ding Road, Haidian District, Beijing, 100039, China
 Phone: +86 (010) 5889 5391/5392/5393
 Fax: +86 (010) 5889 5395
 E-mail: bjicom@bjicom.com
 URL: <http://www.bjicom.com>

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road, Clayton, VIC 3168 Australia
 Phone: +61 (03) 9549 7500
 Fax: +61 (03) 9549 7505
 E-mail: sales@icom.net.au
 URL: <http://www.icom.net.au>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer" 08190, Sant Cugat del Valles, Barcelona, Spain
 Phone: +34 (93) 590 26 70
 Fax: +34 (93) 589 04 46
 E-mail: icom@icomspain.com
 URL: <http://www.icomspain.com>

Icom Polska

Sopot, 3 maja 54, Poland
 Phone: +48 (58) 550 7135
 Fax: +48 (58) 551 0484
 E-mail: icompolska@icompolska.com.pl
 URL: <http://www.icompolska.com.pl>

Your local distributor/dealer:



multisource

Your Single Wireless Connection. A touch of Genius.

Tel.: +27 (0) 11 321 0333 Fax: +27 (0) 11 440 3539
 Internet: www.multisource.co.za
 Email: info@multisource.co.za

P.O. Box 663, Bramley, Johannesburg, 2018
 639 Old Pretoria Main Road, Bramley, Johannesburg, 2018